


# THE SPLITMAX

## Framed 60 Layout Module

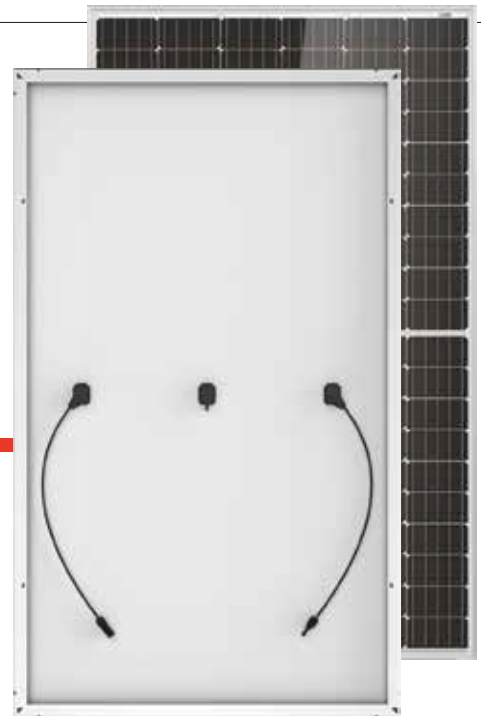

### 60 LAYOUT MONOCRYSTALLINE MODULE

### 295-320W POWER OUTPUT RANGE

### 19.3% MAXIMUM EFFICIENCY

### 0~+5W POSITIVE POWER TOLERANCE

PRODUCTS	COLOR OF FRAME	POWER RANGE
TSM-DE05H(II)	Silver	295-320W
TSM-DE05H.08(II)	Black	295-320W



#### Ideal for large scale installations

- Anti-shading design
- Reduce BOS cost by connecting more modules in a string
- 1500V IEC certified



#### Half-cell design brings higher efficiency

- Half-Cell layout (120 monocrystalline)
- LRF integrated to gain more power, need avoid light sensitive case
- Low thermal coefficients for greater energy production at high operating temperatures
- Low cell connection power lossing



#### Highly reliable due to stringent quality control

- Over 30 in-house tests (UV, TC, HF, and many more)
- In-house testing goes well beyond certification requirements
- PID resistant
- 100% EL double inspection



#### Certified to withstand the most challenging environmental conditions

- 2400 Pa negative load
- 5400 Pa positive load

Founded in 1997, Trina Solar is the world's leading comprehensive solutions provider for solar energy. We believe close cooperation with our partners is critical to success. Trina Solar now distributes its PV products to over 60 countries all over the world. Trina is able to provide exceptional service to each customer in each market and supplement our innovative, reliable products with the backing of Trina as a strong, bankable partner. We are committed to building strategic, mutually beneficial collaboration with installers, developers, distributors and other partners.


#### Comprehensive Products And System Certificates

IEC61215/IEC61730/UL1703/IEC61701/IEC62716  
 ISO 9001: Quality Management System  
 ISO 14001: Environmental Management System  
 ISO14064: Greenhouse gases Emissions Verification  
 OHSAS 18001: Occupation Health and Safety Management System




#### LINEAR PERFORMANCE WARRANTY


10 Year Product Warranty · 25 Year Linear Power Warranty

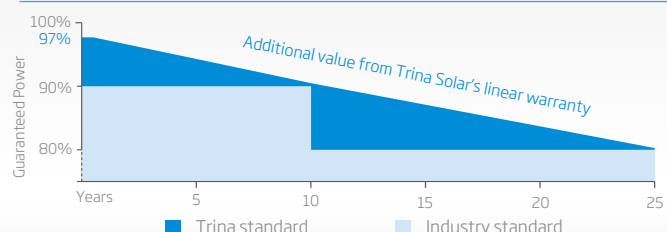


### DIMENSIONS OF PV MODULE(mm)

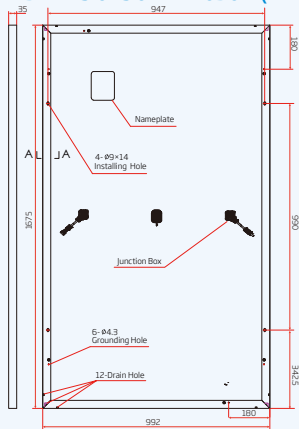

Back View(Portrait)

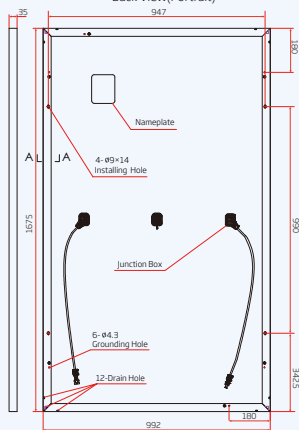


Back View(Landscape)




35 (A-A)

### I-V CURVES OF PV MODULE(315W)

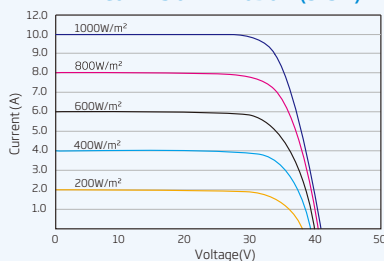

### P-V CURVES OF PV MODULE(315W)

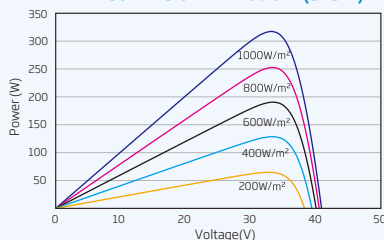

### ELECTRICAL DATA (STC)

Peak Power Watts- $P_{MAX}$ (Wp)*	295	300	305	310	315	320
Power Output Tolerance- $P_{MAX}$ (W)	0 ~ +5					
Maximum Power Voltage- $V_{MPP}$ (V)	32.1	32.4	32.6	32.9	33.1	33.3
Maximum Power Current- $I_{MPP}$ (A)	9.19	9.27	9.36	9.43	9.51	9.60
Open Circuit Voltage- $V_{OC}$ (V)	39.5	39.7	40.0	40.2	40.4	40.6
Short Circuit Current- $I_{SC}$ (A)	9.65	9.70	9.75	9.83	9.93	10.0
Module Efficiency $\eta_m$ (%)	17.8	18.1	18.4	18.7	19.0	19.3

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5.  
\*Measuring tolerance:  $\pm 3\%$ .

### ELECTRICAL DATA (NOCT)

Maximum Power- $P_{MAX}$ (Wp)	219	223	226	230	233	237
Maximum Power Voltage- $V_{MPP}$ (V)	29.9	30.2	30.5	30.7	30.8	31.1
Maximum Power Current- $I_{MPP}$ (A)	7.31	7.38	7.43	7.49	7.57	7.63
Open Circuit Voltage- $V_{OC}$ (V)	36.7	36.9	37.1	37.3	37.5	37.7
Short Circuit Current- $I_{SC}$ (A)	7.79	7.83	7.87	7.94	8.02	8.07

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

### MECHANICAL DATA

Solar Cells	Monocrystalline 156.75 × 78.375 mm (6.17 × 3.09 inches)
Cell Orientation	120 cells (6 × 20)
Module Dimensions	1675 × 992 × 35 mm (65.94 × 39.06 × 1.38 inches)
Weight	18.8 kg (40.8 lb)
Glass	3.2 mm (0.13 inches) High Transmission, AR Coated Tempered Glass
Backsheet	White
Frame	35 mm(1.38 inches) Anodized Aluminium Alloy
J-Box	IP 67 or IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ), Portrait: N 140mm/P 285mm(5.51/11.22 inches) Landscape: N 1200 mm /P 1200 mm (47.24/47.24 inches)
Connector	UTX/MC4 EVO2/TS4*

\* Please refer to regional datasheet for specified connector.

### TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	44°C ( $\pm 2^\circ\text{C}$ )
Temperature Coefficient of $P_{MAX}$	- 0.39%/°C
Temperature Coefficient of $V_{OC}$	- 0.29%/°C
Temperature Coefficient of $I_{SC}$	0.05%/°C

### MAXIMUM RATINGS

Operational Temperature	-40 ~ +85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	20A

(DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection)

### WARRANTY

10 year Product Workmanship Warranty
25 year Linear Power Warranty

(Please refer to product warranty for details)

### PACKAGING CONFIGURATION

Modules per box: 30 pieces
Modules per 40' container: 780 pieces