

# S5-GR1P(3-6)K


Solis Single Phase Inverters



360 degree

## Features:

- ▶ Max. input current **14A**
- ▶ Complies with all state networks requirements
- ▶ Integrate with adjustable Volt-Watt and Volt-Var function
- ▶ DRM integrated, fully comply with AS/NZS 4777.2:2020
- ▶ Built-in DC-PV2 Switch (optional), comply with AS/NZS 5033 requirements
- ▶ Support 24h consumption monitoring with a smart meter
- ▶ Super high frequency switching technology
- ▶ 2 MPPT design with precise MPPT algorithm
- ▶ Integrated Export Power Manager(EPM)
- ▶ Compact and lightweight
- ▶ Voltage active power and reactive power

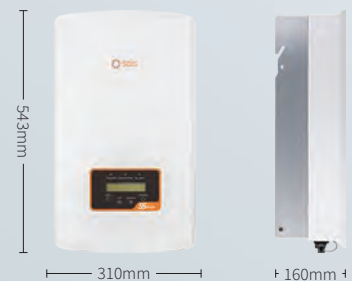

## Model:

S5-GR1P3K	S5-GR1P3.6K
S5-GR1P4K	S5-GR1P4.6K
S5-GR1P5K	S5-GR1P6K

## Datasheet

Model Name	S5-GR1P3K	S5-GR1P3.6K	S5-GR1P4K	S5-GR1P4.6K	S5-GR1P5K	S5-GR1P6K
<b>Input DC</b>						
Recommended max. PV power	4 kW	4.8 kW	5.3 kW	6.1 kW	6.7 kW	8 kW
Max. input voltage	600 V					
Rated voltage	330 V					
Start-up voltage	120 V					
MPPT voltage range	90-520 V					
Max. input current	14 A / 14 A					
Max. short circuit current	22 A / 22 A					
MPPT number/Max. input strings number	2/2					
<b>Output AC</b>						
Rated output power	3 kW	3.6 kW	4 kW	4.6 kW	5 kW	6 kW
Max. apparent output power	3 kVA	3.6 kVA	4 kVA	4.6 kVA	5 kVA	6 kVA
Max. output power	3 kW	3.6 kW	4 kW	4.6 kW	5 kW	6 kW
Rated grid voltage	1/N/PE, 230 V					
Rated grid frequency	50 Hz					
Rated grid output current	13.0 A	15.7 A	17.4 A	20.0 A	21.7 A	27.3 A
Max. output current	15.7 A	16.0 A	21.0 A	23.8 A	25.0 A	27.3 A
Power Factor	>0.99 (0.8 leading - 0.8 lagging)					
THDi	<3%					
<b>Efficiency</b>						
Max. efficiency	97.3%		97.6%		97.7%	
EU efficiency	96.6%		97.1%		97.1%	
<b>Protection</b>						
DC reverse-polarity protection	Yes					
Short circuit protection	Yes					
Output over current protection	Yes					
Surge protection	Yes					
Grid monitoring	Yes					
Anti-islanding protection	Yes					
Temperature protection	Yes					
Integrated DC switch	Optional (PV2 Switch)					
<b>General Data</b>						
Dimensions (W*H*D)	310*543*160 mm					
Weight	11.5 kg					
Topology	Transformerless					
Self consumption (night)	<1 W					
Operating ambient temperature range	-25 ~ +60°C					
Relative humidity	0-100%					
Ingress protection	IP66					
Cooling concept	Natural convection					
Max. operation altitude	4000 m					
Grid connection standard	AS/NZS 4777.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530					
Safety/EMC standard	IEC 62109-1/-2, IEC 61000-6-2/-3					
<b>Features</b>						
DC connection	MC4 connector					
AC connection	Quick connection plug					
Display	LCD					
Communication	RS485, Optional: Wi-Fi, GPRS					